

Baby-LIN-RC-II

LIN-Bus simulation device with integrated keypad



Product description

The Baby-LIN-RC-II allows to control LIN-Bus equipped devices by using a standard PC. After installation of the supplied **LINWorks** software, you can connect the Baby-LIN-RC-II to a free USB port, and access the LIN-Bus devices via LINWorks or own programs by using the Baby-LIN-DLL.

The Baby-LIN-RC-II also has an integrated membrane keyboard with six keys. Each button can be assigned to any LIN-Bus commands. Thus, it is also usable as an autonomous remote control for the LIN-Bus. The Baby-LIN-RC-II offers the possibility of using two keys as SHIFT-keys which extends the usable number of six keys up to twelve.

The power for the Baby-LIN-RC-II can be supplied either from the USB or the LIN-Bus side. If the device is powered by the LIN-Bus it can be operated without the need for a PC.

The Baby-LIN-RC-II has a microSD card slot that can be used for logging purposes. The associated LED is used to show the logging status as well as the firmware update and boot state.

The Baby-LIN-RC-II can handle bus voltages in the range of 8-26 VDC.

All communication interfaces (LIN-Bus, USB) are **galvanically isolated**, eliminating interferences between the PC and the board electronics.

The Baby-LIN-RC-II unit includes its own 32-bit microcontroller, which takes care of all **time critical** tasks of the LIN-Bus protocol.

The device firmware is field updateable, so the changes of bus specification or upcoming new system features can be adapted easy.

The Baby-LIN-RC-II supports **SDF-V3**. This new generation of SDF allows new features like multiple bus sections, conditional macro commands, new system variables, new CRC functions and sub macro calls.

Operation modes

Any situation that requires communication with a LIN device is a potential field of application for a Baby-LIN-RC-II. It is a versatile tool that can be used in research laboratories, test departments and production (EOL applications).

The Baby-LIN-RC-II allows for different operation modes to support typical use cases like:

- **Monitor** and log all frames on the bus without the need for a SDF. If a SDF is available signal values can also be monitored.
- **Control** the bus via the **LINWorks** software or customer specific applications by using the **Baby-LIN-DLL**.
- **Program** and store free programmable command sequences in the Baby-LIN-RC-II to run it as a **stand-alone** device without the need for a PC. Thus you can run a bus driven ECU in a **durability test** or **EOL applications** without any PC connected.

Simulation modes

The Baby-LIN-RC-II is able to simulate different configurations of LIN-Bus nodes. It is possible to **simulate any number of nodes** ranging from none to all. These are some typical configurations:

- Simulate the **LIN-Bus master** to operate slave nodes.
- Simulate any number of **LIN-Bus slave** nodes.
- Simulate all but one node and realize a **rest-bus simulation**.
- Simulate **all nodes** and therefore the complete communication on the bus.
- Simulate no node to **monitor** the bus communication only.

LIN-Bus properties

The used LIN driver supports bus voltages of 8-26 VDC and can be used to up to 125 kBaud. That way even nodes that operate outside the standard limits of the LIN specifications can be controlled with the Baby-LIN-RC-II. Supported LIN-versions are V.1.2, V.1.3,...V.2.2.

The maximum supported signal cable length of the LIN-Bus is 30m.

LinWorks suite

The purchase of a Baby-LIN-RC-II includes the licence to download the **LINWorks** suite. This suite is a collection of PC software that supports you during the whole workflow.

The **LDFedit** allows the inspection, creation and edit of a LDFFile (LIN Description File).


The **SessionConf** allows the inspection, creation and edit of a SDFFile (Session Description File) and features a file import for LDFFiles (for LIN-Bus simulation). It defines everything needed for a complete simulation of each available bus, e.g. which nodes on each bus are available and which nodes should be simulated by the Baby-LIN-RC-II. Moreover it allows to define an application logic. This programming ability is available for each device out of the box.

The **SimpleMenu** is used to establish a connection to the Baby-LIN-RC-II and upload SDFFiles, change the device target configuration, control the bus and monitor the frames and signals on the bus. Even without a LDFFile/SDFFile the bus can be monitored and the frames can be logged.

The **Baby-LIN-DLL** allows customers to create their own application and use all features of the Baby-LIN-RC-II like controlling and monitoring the LIN-Bus interfaces. The **Baby-LIN-DLL** is a native **C/C++** DLL. A wrapper for **.NET** applications is also provided as **LabView** files. Examples are available for all supported languages.

The **LogViewer** can show and convert the log files of the Baby-LIN-RC-II as well as the SimpleMenu.

The **LINWorks** software runs on 32 and 64 bit Windows versions. A **Linux version** for the main components is also available upon request.

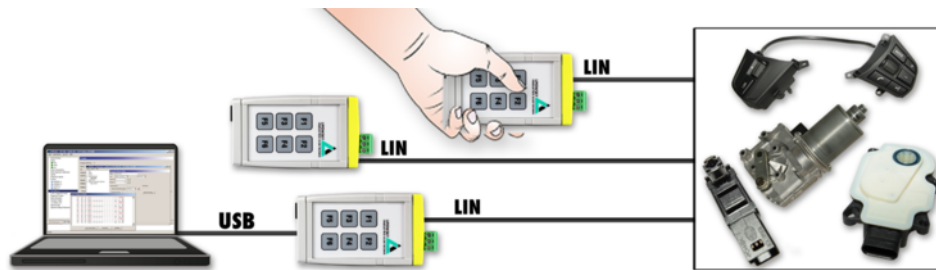

Technical Specifications

Device

- CPU: ARM Cortex-M4, 168 MHz
- Memory: 196 kB RAM
- 2 LEDs: Signal bus and error states
- 1 LED: Signal the firmware update and boot state
- Integrated membrane keyboard with 6 keys
- Power supply: via USB or LIN-Bus power
- Maximum current consumption: 70 mA @ 12 VDC
- Galvanic isolation of all communication interfaces (LIN-Bus, USB)

Interface: LIN

- 1 LIN-Bus interface
- LIN-Bus connection via 3 pin connector (MC 1,5/ 3-ST-3,81)
- LIN-Bus supply voltage: 8-26 VDC
- LIN-Bus baud rate: up to 125 kBaud (Support of protocols outside of the LIN specification)
- Supported LIN versions: V1.2, V1.3,...V2.2

- Supported LIN related protocols: Cooling and SAE J2602
- Maximum signal cable length for LIN-Bus: 30 m

Interface: USB Device


- USB 2.0 interface
- Connection via USB type B-Mini

Interface: Micro SD card

- Supported card types: microSD cards, microSDHC cards
- Supported file system: FAT-32, FAT-16
- Maximum card size: 32 GB

Case

- Degree of protection: IP20
 - Operating temperature: -20° - +65° Celsius
 - Weight: 40 g
 - Case dimensions [mm]: 78 x 45 x 18 (L x W x H)
- Elements like connectors are not included.

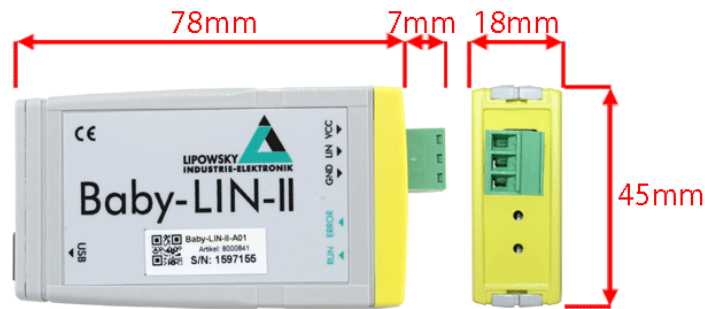

Hardware requirements

The following hardware is required to operate the Baby-LIN:

Requirement	Purpose
A PC with about 200 MB free hard drive space	Required for the installation of the LINWorks software. Please check the software requirements and use cases.
A free USB port	Required to transfer SDFs to the Baby-LIN-RC-II.
	Required for firmware updates.

Software requirements

The LINWorks software requires one of the following operating systems:

- Windows XP
- Windows Vista (32 and 64 Bit)
- Windows 7 (32 and 64 Bit)
- Windows 8 (32 and 64 Bit)
- Windows 10 (32 and 64 Bit)
- Linux (a version is available on request)

Some additional tools available in the LINWorks software suite require an installed .NET Framework v4.0.

To install LINWorks components administration privileges are required.

Scope of delivery

The delivery of a Baby-LIN-RC-II systems includes the following components:

- Baby-LIN-RC-II device
- USB 2.0 cable, 1.5m, Type A to type B-Mini
- Plug components for all terminals:
 - 1 3-pin plug with screw connection (MC 1,5/ 3-ST-3,81)
- Download licence for the LINWorks Suite (includes LINWorks PC software, USB-driver, example files and documentations)

Ordering informations

Main device		
Item number	Item	Description
8000841	Baby-LIN-RC-II	LIN-Bus simulation device with integrated keypad



Advice

Each device includes a download licence for the LINWorks application suite. This PC software can be downloaded using our client portal: portal.lipowsky.de



Warning

Country of origin: Germany
 Customs tariff number: 90308930

Optional hardware components

Item number	Item	Description
3000681	16 GB microSDHC card	This microSDHC card can be used to log the LIN-Bus communication.
3500701	USB 2.0 cable, 1.5m Type A to type B-Mini	This cable connects the Baby-LIN-RC-II to a PC. Such a cable is already within the scope of delivery.
3021303	MC 1,5/ 3-ST-3,81	3-pin plug component, screw connection with tension sleeve. Cable outlet parallel to plug-in direction. Screw direction vertical to plug-in direction.



Advice

All devices are delivered with a full set of plug components. An extra order is necessary for replacement or configuration purposes only.

Optional voucher codes

Item number	Item	Description
8000943	Option-BL-RC-II-microSD-Support	Licence code for Baby-LIN-RC-II to support logging to the microSD card.
8000831	Option-BL-HARP-Jumbo Frames	License code for Baby-LIN-RC-II to support the jumbo frame feature (frames with more than 8 data bytes).

Optional software components

Item number	Item	Description
9004210	Customer specific installation.	Installation of customer specific SDF file version and/or installation of license activation key.
9103010	LIN Works CD	PC-Software for all BABY-LIN devices on a physical medium (CD).

Distributors

Area	Country	Distributor	Website	Phone	Email
Asia		Hongke Technology Co. LTD	www.hkaco.com	+86 20 3874 4538	sales@hkaco.com
		Microport Computer Electronics Inc.	www.microport.com.tw	+886 6 330 3000	inquiry.microport@gmail.com
		KMDATA Inc.	www.kmd.co.kr	+82 2 3281 0333	daniel@kmd.co.kr
North America		FEV North America Inc.	www.fev.com	+1 248 293 1300	marketing_fev@fev.com
		Círculo SEI S.A de C.V.		+52 473 1030459	franckasb@gmail.com
Europe		ISIT	www.isit.fr	+33 561 306 900	contact@isit.fr
		The Debug Store	www.thedebugstore.com	+44 1490 430526	sales@TheDebugStore.com
Worldwide		Lipowsky Industrie-Elektronik GmbH	www.lipowsky.com	+49 (0) 6151 / 93591 - 0	info@lipowsky.de

More details about our distributors can be found on our website under the heading [contact/distributors](#).